


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

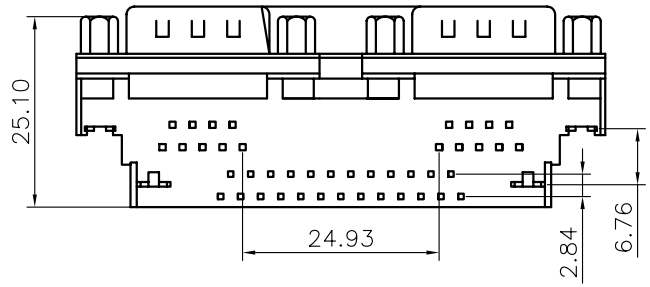

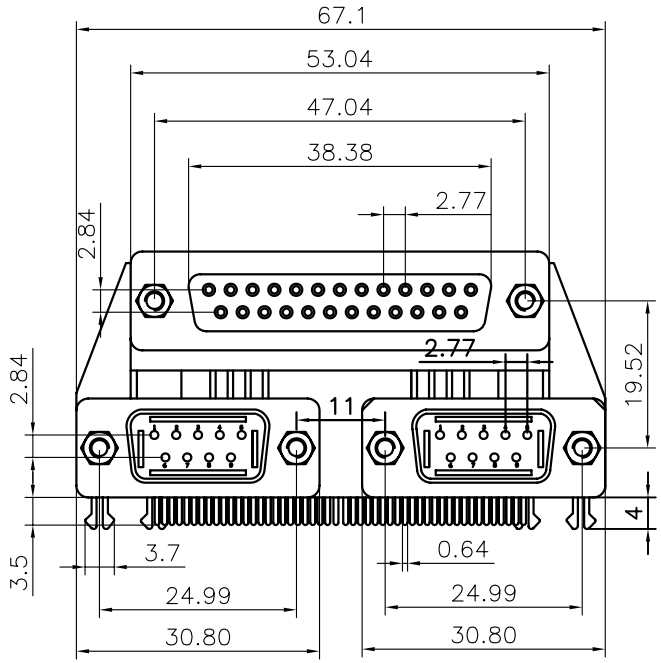



NOTES:

1. SPECIFICATION:
   - . Current Rating: 3A.
   - . Insulation Resistance: 1000MΩ min.
   - . Dielectric Withstanding:500V for One minute.
   - . Contact resistance: 100mΩ max.
   - . Operating Temperature:−20°C to +105°C
2. MATERIALS
   - . Insulator: PBT With 30% Glass Fiber(UL 94V−0)
   - . Contact: Copper alloy.
   - . Shell: Stell.
   - . Board Lock: Copper alloy
3. PRODUCT NUMBER CODE:

DS1081 − X X X X

- Contact Plating
  - 6:Tin
  - 0: Selective Gold flash
- Shell plating
  - N: nickel
- Color of 25pin Housing
  - P: Purple
  - B: BLACK
  - L: BLUE
- Color of 9pin Housing
  - B: BLACK
  - L: BLUE

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1081−W1T		

PROJECTION		TITLE	D−SUB CONNECTORS THREE IN ONE(25F/2*9M)
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1081

DRN-25F9M9M 1081